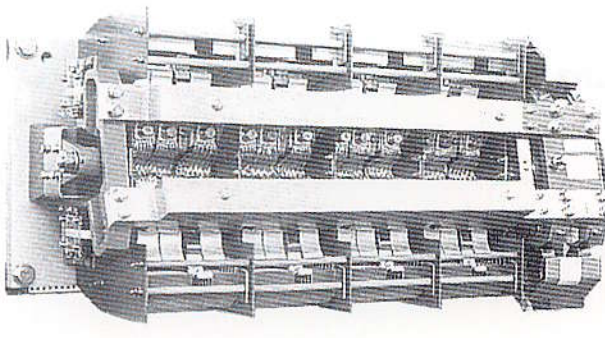
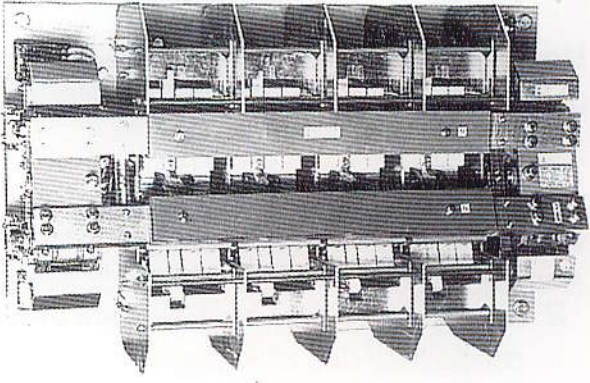
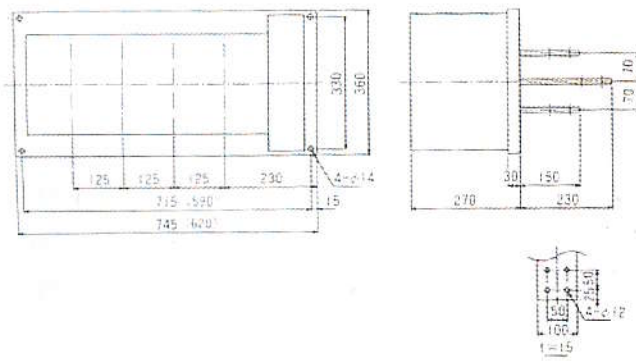
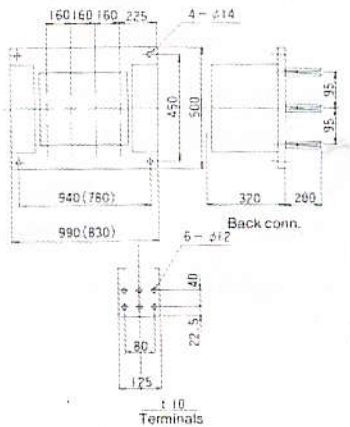


| 6200 MZ | | 6300 MZ | |
|---|------|---|------|
|  | |  | |
| 660 V | | 660 V | |
| 2200 A | | 3300 A | |
| 2000 A | | 3000 A | |
| — | | — | |
| 20000 A | | 20000 A | |
| Class 5 (50000 times) | | | |
| Class 5 (10000 times) | | | |
| No. 4 (150times / hr) | | | |
| 2750 V AC 1min (50 / 60Hz) | | | |
| 2100 V AC 1min (50 / 60Hz) | | | |
| 3 P | 4 P | 3P | 4P |
| 10.5 | 13.9 | 19.1 | 27.5 |
| 8.7 | 11.7 | 15.5 | 21.5 |
| 4.8 | 6.5 | 7.8 | 12.5 |
| Class A | | | |
| 2NO - 2NC as standard (switching capacity 200V AC 15A) | | | |
| BS 5424 IEC 947-6-1 IEC 158-1 JEM 1038 | | | |
|  | |  | |
| 105 | 125 | 210 | 240 |
| Phase N is designed for early make and late break 6200MZ & 6300MZ is back wiring only | | | |