



## Feature

These cables are applied for the control circuit of 600 V or less

## CONSTRUCTION

### Conductor

Circular stranded or circular compressive stranded annealed copper conductor.

### Insulation

Extruded colored PVC, Polyethylene or cross-link XLPE, capable for the operating continuously maximum temperature of the cable.

### Outer Sheath

Extruded Black PVC or Black Polyethylene, suitable for the operating temperature of the cable.

### Identification of cores

On request with cores in different colors or numbering code figures

### Copper Screened

Annealed copper tape applied helically overlap before outer sheath for CVVS.


**Specification** : JIS C 3401 - 1987

JCS 258 C (for CVVS)

(Other Specifications are available upon request)

## Type Designation

Example : C V V S

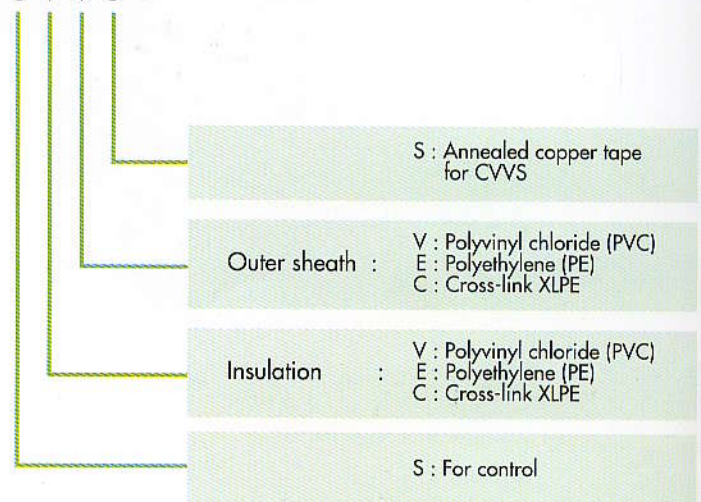

- Type** :
- CVV
  - CEV
  - CEE
  - CCV
  - CCE
  - CVVS