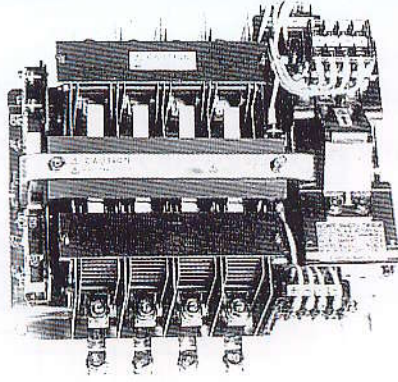
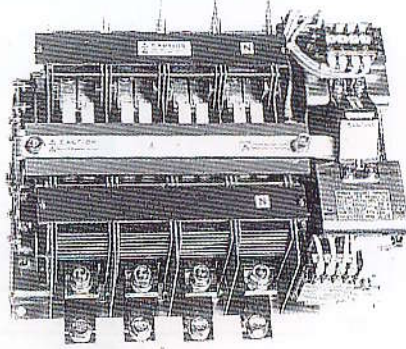
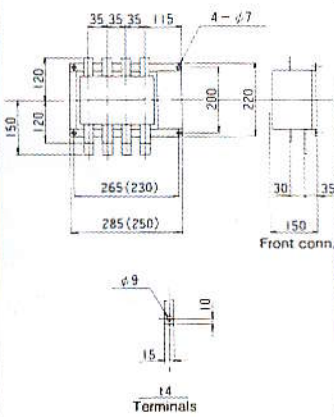
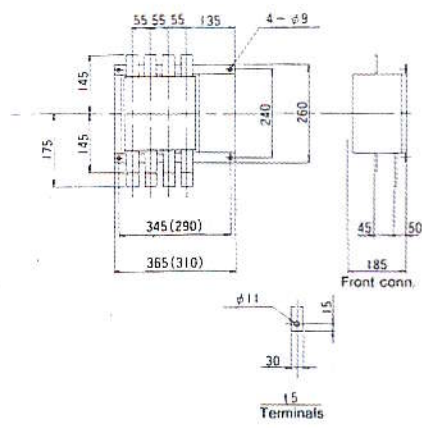


SSK SERIES

| TYPE | 615 MZ | | 630 MZ | | 640 MZ | | |
|--|---|------|---------|--|---|-----|-----|
| Photo by 4 poles |  | | | |  | | |
| Maximum rated operational voltage | 660 V | | 660 V | | 660 V | | |
| Current rating for AC1 duty | 150 A | | 300 A | | 400 A | | |
| Current rating for AC2 duty | 110A | | 220 A | | 330 A | | |
| Current rating for AC3 duty | 100 A | | 200 A | | 300 A | | |
| Short time current capacity (1 second) | 5000 A | | 10000 A | | 10000 A | | |
| Mechanical life | Class 4 (250000 times) | | | | | | |
| Electrical life | Class 4 (50000 times) | | | | | | |
| Switching frequency | NO. 4 (150times / hr) | | | | | | |
| Main circuit withstand voltage | 2750 V AC 1min (50 / 60 Hz) | | | | | | |
| Control circuit withstand voltage | 2100 V AC 1min (50 / 60 Hz) | | | | | | |
| Operational current | No. of pole | 3P | 4P | 3P | 4P | 3P | 4P |
| | 220V AC | 4.8 | 7.1 | 5.5 | 7.7 | 5.5 | 7.7 |
| | 240V AC | 4.1 | 5.5 | 4.4 | 5.7 | 4.4 | 5.7 |
| | 400V AC | 2 | 3.2 | 2.8 | 4 | 2.8 | 4 |
| Coil Insulation class | Class A | | | | | | |
| Aux. contact | 2NO-2NC as standard (switching capacity 200V AC 15A) | | | | | | |
| Applicable standards | BS 5424 IEC 158-1 JEM 1038 | | | | | | |
| Overall dimensions ()LS applied to model 3P |  | | |  | | | |
| Weight (Kg) | 9.5 | 10.5 | 17.5 | 20 | 17.5 | 20 | |
| Note | Phase N is designed for early make and late break 6200MZ & 6300MZ is back wiring only | | | | | | |